



EOTECH
more for science




Hair

MiniSURF

Ex-vivo 3D imaging system
for micro-surfaces analysis

.....

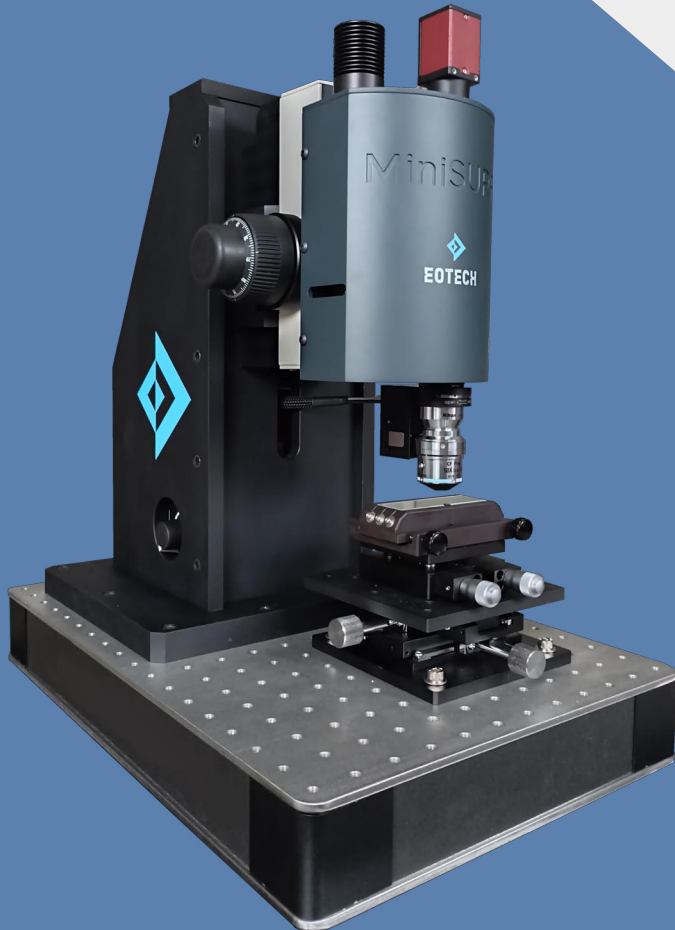

Product description

Technology

MiniSURF is a full field optical profilometer, based on phase shifting interferometry. This microscope combines a black and white camera, a 50x high end interferometric lens, a LED light source and a high accuracy piezo electric motor. The optical head is mounted on a robust column fixed on a passive antivibration table.

Main features

No sample preparation is required. Being based on non contact techniques, it is a non destructive measurement. Its unique algorithm provides both contrast images and calibrated surface measurements and especially roughness parameters according to linear profiles, making it a perfect tool for hair surfaces state measurement.

Software

The MiniSURF software will guide the user to acquire the surface structure, and will calculate parameters like profiles and surface roughness, structure porosity and other parameters. The software allows to visualize contrast image and surface topography with stunning rendering, in order to illustrate clinical studies and to support the associated cosmetic claims for hair care products.

Applications



Single hair measurement:

- Scales
- Damages
- Surface state



Advantages :

- Compact device
- Cost effective solution
- Non destructive
- Quantitative and qualitative results
- All-in-one software


Cosmetic claims:

- Gloss
- Repair
- Smoothing
- Sheathing



Technical data

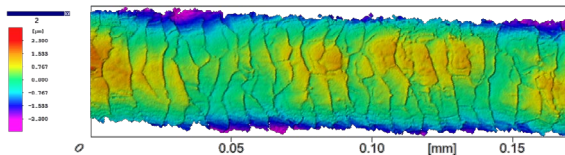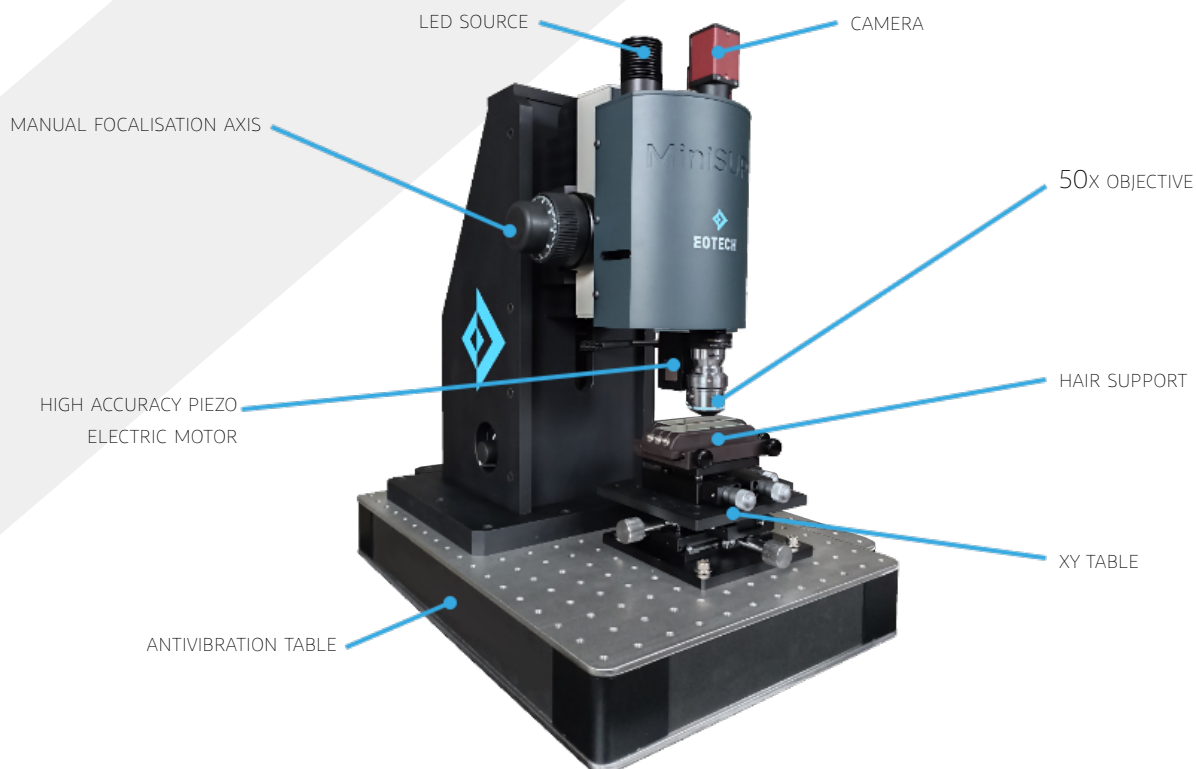


Surface

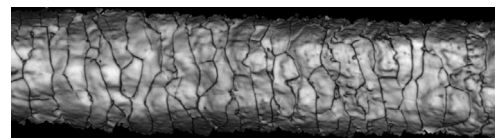


Contrast



Profiles roughness

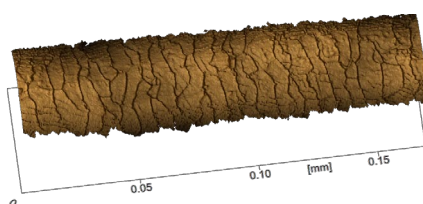

Rendering

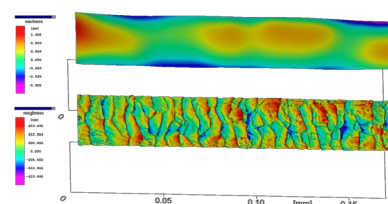

Cut Off

System specifications

Characteristics	Value
Illumination	LED (Wavelength : 565 nm ; FWHM : 104 nm)
Camera	1456 x 1088 pixels (1.6 Mp)
XY range	50 x 50 mm ²
Z range	30 mm
Focus range	100 µm
Weight	30 kg
Size (LxHxP)	450 x 450 x 300 mm

Imaging specifications

Characteristics	Value
Magnification	50X
Measurement surface (µm ²)	160 x 120
Working distance (mm)	3.4
Optical resolution (µm)	0.5
Lateral sampling (µm)	0.11
Standard Z resolution (µm)	0.05

Exclusive Distributor for the United States & Central America

Skinlabs
755 NE 164th Terrace
Miami, FL 33162 - USA

Tel. (786)288-0740

Email : info@skinlabsusa.com

Website : www.skinlabsusa.com